



REPUBLIC OF TURKEY
MINISTRY OF TRANSPORT
AND INFRASTRUCTURE



ÇUKUROVA REGION AND İSKENDERUN BAY RAILWAY
CONNECTION PROJECT
TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN
CNR-ADN-TTMP-002
Final

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 2 / 20



Bağlıca Mah. Çambayırı Cad. Çınar Plaza No:66/5 06790 Etimesgut/ ANKARA

Tel: +90 312 472 38 39 Fax: +90 312 472 39 33

Web: cinarmuhendislik.com

E-mail: cinar@cinarmuhendislik.com

All rights of this report are reserved.

All or part of this report cannot be reproduced, copied, electronically reproduced, traded, transmitted, sold, rented, used for any purpose, or used in any form and method in digital and/or electronic media without written permission from Çınar Engineering Consultancy Inc. as per the Law No. 5846 on Intellectual and Artistic Works amended with the Law No. 4110.



**REPUBLIC OF TURKEY
MINISTRY OF TRANSPORT
AND INFRASTRUCTURE**



TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 3 / 20

Project Owner	T. C. Ministry of Transport and Infrastructure General Directorate of Infrastructure Investments
Address	Hakkı Turaylıç Cad. No: 5 06338 Emek/Çankaya/ANKARA
Telephone and Fax Numbers	+90 (312) 203 10 00
Project Title	Çukurova Region and İskenderun Bay Railway Connection Project
Project Location	Adana Province - Yumurtalık and Ceyhan District, Hatay Province - Erzin District
Consultant	Çınar Engineering Consultancy Inc.
Address	Bağlıca Mah. Çambayırı Cad. Çınar Plaza No: 66/5 06790 Etimesgut / ANKARA
Telephone and Fax Numbers	Phone: +90 (312) 472 38 39 Fax: +90 (312) 472 39 33
Report Submission Date	March 2024

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 4 / 20

TABLE OF CONTENTS

TABLE OF CONTENTS	4
LIST OF TABLES	5
LIST OF FIGURES	5
ABBREVIATIONS & DEFINITIONS	6
1. INTRODUCTION	7
1.1. Purpose.....	7
1.2. Scope	7
1.3. Objectives and Performance Indicators	8
1.4. Roles and Responsibilities	8
2. LEGAL FRAMEWORK	10
2.1. National Legislation.....	10
2.2. International Standards	10
3. TRAFFIC MANAGEMENT	11
3.1. Transportation to the Railway Location.....	11
3.2. Construction Phase.....	13
3.3. Operation Phase	15
4. MITIGATION MEASURES AND MANAGEMENT CONTROLS	16
5. TRAINING, REPORTING AND MONITORING	18
5.1. Training	18
5.2. Reporting and Monitoring.....	18
6. REFERENCES	20

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 5 / 20

LIST OF TABLES

Table 1. Key Performance Indicators for TTMP	8
Table 2. Vehicles and Equipment to be used during the Construction Phase of the Project.....	13
Table 3. Road Traffic Regulation, Minimum and Maximum Speed Limits for Vehicle Types	15
Table 4. Monitoring Activities	18

LIST OF FIGURES

Figure 1. Transportation to the Project Area	12
--	----

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 6 / 20

ABBREVIATIONS & DEFINITIONS

CONTRACTOR	Expert Firms responsible for the construction of the Project on behalf of DGII
DGII	General Directorate of Infrastructure Investments
ESIRT	Environment and Social Incidence Response Toolkit
ESMP	Environmental and Social Management Plan
ESS	Environmental and Social Standard
GIIP	Good International Industry Practice
HS	Health and Safety
OHS	Occupational Health and Safety
PS	Performance Standard
RCA	Root Cause Analysis
TAYSEB	Toros Adana Yumurtalık Free Zone
TTMP	Traffic (Transportation) Management Plan



TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 7 / 20

1. INTRODUCTION

1.1. Purpose

Traffic (Transportation) Management Plan (TTMP) has been prepared to cover all phases of the Project in accordance with World Bank ESS, the regulatory frameworks of the Republic of Türkiye, World Bank Group (WBG) General Environmental, Health, and Safety (EHS) Guidelines, and applicable International Good International Industry Practice (GIIP).

TTMP has been prepared to cover the investment/operation phase of the Project in line with the aforementioned Project Standards. The main purpose of this TTMP is to define the requirements for traffic management during the investment and operation phase of the Project, identify management practices and ensure that all practices are in line with the Project Standards.

The main objectives of the TTMP are set out below:

- The TMMP will be developed by contractors and the Project Owner to identify measures to minimize the impacts of traffic generated by the Project.
- To prevent traffic-related injuries and fatalities during the investment and operation phases of the Project and to control the risks that cause them,
- Minimize traffic jams, provide safe, fast and easy access for emergency vehicles,
- Minimize fuel consumption during the investment and operation phases of the Project.

1.2. Scope

TTMP covers the planned land preparation and construction activities of the Project. It is prepared for implementation by DGII employees, contractors and sub-contractors. Contractors are also required to adopt TTMP requirements within their management plans. In addition, this plan includes the mitigation measures and administrative actions required for the increase in traffic caused by the project. All contractors and subcontractors will comply with the requirements of this plan.

Extensive transportation activities will take place during the land preparation and construction phase of the Project. The movement of Project trucks for land preparation and construction works will lead to an increase in traffic load. Other factors contributing to increased road traffic during land preparation and construction activities include:

- The entry and exit of personnel working at various points in the Project area,
- Transportation of equipment, construction materials, and waste."

The TTMP includes the mitigation measures and administrative practices required to prevent or minimize the negative impacts on the environment and society that will occur as a result of the activities to be carried out during the investment and operation phases of the Project by evaluating the traffic load together with the existing traffic load.

TTMP is part of the Project's Environmental and Social Management Plan (ESMP) and covers all activities during the investment and operation phases of the Project. It should therefore be considered together with other relevant plans/procedures prepared in this scope.

1.3. Objectives and Performance Indicators

The primary objective of this TTMP is to establish a secure working environment for all Project staff and safeguard the impacted communities and biodiversity values from potential traffic hazards arising due to increased traffic load resulting from the Project's land preparation and construction activities. This plan will particularly focus critical points along the construction route, especially near project elements like camp sites and auxiliary facilities (temporary construction material storage areas, etc.). The TTMP will be enacted to ensure the implementation of all traffic-related management controls and to provide necessary training to both Project staff and affected communities.

Within the scope of TTMP, the goal is to minimize the occurrence of potential traffic incidents. The key performance indicators for the TTMP are as follows:

Table 1. Key Performance Indicators for TTMP

Key Performance Indicator	Timeframe	Record	Responsibility
Number of reported on-site traffic accidents,	Zero in a year	HS Records	Contractor
Monitoring reports on vehicle maintenance,	Monthly	HS Records	Contractor
Speed limits in place and enforced,	Zero traffic penalty in a year	HS Records	Contractor
Project staff and community training on traffic safety, signs and rules to follow	Twice a year	Training records	Contractor
Traffic signs and warnings are placed at appropriate locations,	After logistics study and weekly controls	HS Records	Contractor
Complaints on project vehicles and drivers,	Zero in a year	Complaint records	Contractor
Number of road repair works	Once a year (after rainy seasons that may impact the roads adversely)	Monitoring Records	Contractor
Communication records with authorities and communities in terms of early warnings, incidents, potential hazards and emergencies	If required	HS Records	Contractor
Project road damage/repair records	Once a year	HS Records	Contractor
Participation rate in trainings related to the plan	Once a year	HS Records	Contractor
Permits and licenses related to the transport of dangerous goods and other traffic issues.	If required	HS Records	Contractor

1.4. Roles and Responsibilities

DGII will monitor the implementation of the TTMP through auditing and inspections. The Contractor will ensure that subcontractors work in compliance with the requirements of the TTMP. The Contractor will avoid the sensitive residential areas and historical and cultural road infrastructure during defining the traffic routes. The Contractor will also ensure minimal damage to road infrastructure, communicate with the local authorities in case of road damages, and repair such damages. The Contractor will develop, implement and maintain a Project-specific TTMP and related procedures. The Contractor's TTMPs will include, but not be limited to;

- The identification of the transportation routes for the goods and material to and from working area,
- The interface with the Logistics Study that will be prepared by Contractor,
- The deficiencies in the existing local infrastructure in coordination with DGII and develop upgrading plans,

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 9 / 20

- Identification of access roads,
- Defining speed limits,
- Details of the training program for drivers,
- Managing workforce transportation,
- Creating an access road register,
- Assessing existing and new access roads before use,
- Providing road signage,
- Conducting training programs for the community.

The Contractor will prepare a TTMP to ensure road traffic safety and mitigate potential risks arising from the anticipated increase in traffic load during the land preparation and construction phases of the Project. This plan will serve as the foundation for both the operation and decommissioning phases. The additional vehicle load, types, and counts that may be observed on the highway during the land preparation, construction, and operation phases of the Project will be determined, calculated as percentages, and disclosed. The Traffic (Transport) Management Plan, once developed, will be submitted to DGII, and activities will be executed in coordination with them.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 10 / 20

2. LEGAL FRAMEWORK

2.1. National Legislation

Environmental Law No. 2872, Labor Law No. 4857, OHS Law No. 6331, and Highway Traffic Law No. 6047 are the regulations that are at the forefront of this process management. Particularly, the current Turkish national standards regarding traffic and road safety are summarized below.

- Regulation on Highway Traffic (Official Gazette No. 23053 dated 18.07.1997)
- Regulation on the Transport of Dangerous Goods by Road (Official Gazette No. 31870 dated 18.06.2022)
- Regulation on Facilities to be Built and Opened on the Roadside (Official Gazette No. 31922 dated 13.08.2022)

2.2. International Standards

As the WB is the lending institution for the project, it should be in line with National Legislation as well as international standards and good industrial practices.

IFC has established Environmental and Social Performance Standards to define its clients' responsibilities for managing their environmental and social risks. During the investment period, the borrower is required to comply with these standards. The international standards and guidelines applicable to this TMMP are listed below:

World Bank Environmental and Social Standards

- ESS1: Assessment and Management of Environmental and Social Risks and Impacts,
- ESS2: Labor and Working Conditions,
- ESS3: Resource Efficiency and Pollution Prevention and Management,
- ESS4: Community Health and Safety

WBG General Environment, Health and Safety (EHS) Guideline (2007)

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 11 / 20

3. TRAFFIC MANAGEMENT

3.1. Transportation to the Railway Location

Within the scope of the Project, it is planned to construct a railway connection line to the industrial facilities in Çukurova Region and İskenderun Bay – Toros, Adana, Yumurtalık Free Zone (TAYSEB) industrial centers and ports. The main purpose of the Çukurova Region and İskenderun Bay Railway Connection Sub-Project (the Project) is to make the transportation of raw materials and products economical by making infrastructure connection (such as OIZ - Port connection, OIZ - Main line connection) between the industrial areas. The railway connection line will connect the existing Osmaniye OIZ, Ceyhan OIZ and Ceyhan Energy Specific OIZ to the existing Toprakkale - İskenderun railway line at the existing Erzin Station.

The Çukurova Region and İskenderun Bay Railway Connection Project is situated within the boundaries of Yumurtalık District in Adana Province, and Erzin District of Hatay Province in the south of Türkiye. The total railway line length is approximately 44 km with the branch lines and the detailed information on the lines is given below.

Erzin Station – TAYSEB Connection Line: The planned line starts from the existing Erzin Station (Km: 0+000), continues parallel to the Toprakkale-İskenderun Railway Line about 1,900 m to the south, and leaving to continue to the west. Between Km: 7+000 and Km: 8+000, it passes through west of Yukarıburnaz and arrives to Toros Adana Yumurtalık Free Zone (TAYSEB). This line will be located within the borders of Adana and Hatay Provinces. Two new stations are planned on this line. These are:

- Station-1 between Km: 7+740 and Km: 8+940 in the North of Yukarıburnaz,
- Station-2 between Km: 15+000 and Km: 16+100 (TAYSEB)

The connection between the existing Osmaniye OIZ, Yumurtalık Free Zone, Ceyhan OIZ, Ceyhan Energy Specific OIZ, and connection between existing Toprakkale-İskenderun railway line will be provided with the existing Erzin Station.

OIZ-Port Line: It is the line that will provide the connection between Osmaniye OIZ and Erzin port to be constructed. In this context, the line will be located in the borders of Hatay Province. The line starting from Osmaniye OIZ and proceeding in the south-southwest direction, starting from Km: 5+600, reaches to the port, which has not come into service, by continuing parallel to the OIZ-Port Connection Highway. The total length of the line is 14,340 m. Two new stations are planned on this line. These are:

- Station-3 between Km: 0+000 and Km: 0+900 (Osmaniye OIZ)
- Station-4 between Km: 13+480 and Km: 14+340 (Erzin Port)

Other Connection Lines: Two connection lines are planned to be established in order to provide the connection between the aforementioned Connection line and OIZ-Port line through Station-1.

- OIZ – Yukarıburnaz Station Connection Line is about 2,315 m,
- Yukarıburnaz Station – Port Connection Line is about 2,110 m.

Access to the Project area is provided by Ceyhan-İskenderun Highway, E91 Adana-Toprakkale İskenderun Highway and D817 Adana İskenderun Highway (See. Figure 1). The project's area of influence (AoI) passes through industrial lands, a coal storage facility, pasture lands, agricultural production areas, fruit orchards, and apiculture area. The closest settlement is Yukarıburnaz approximately 30 m away from the project site.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 12 / 20

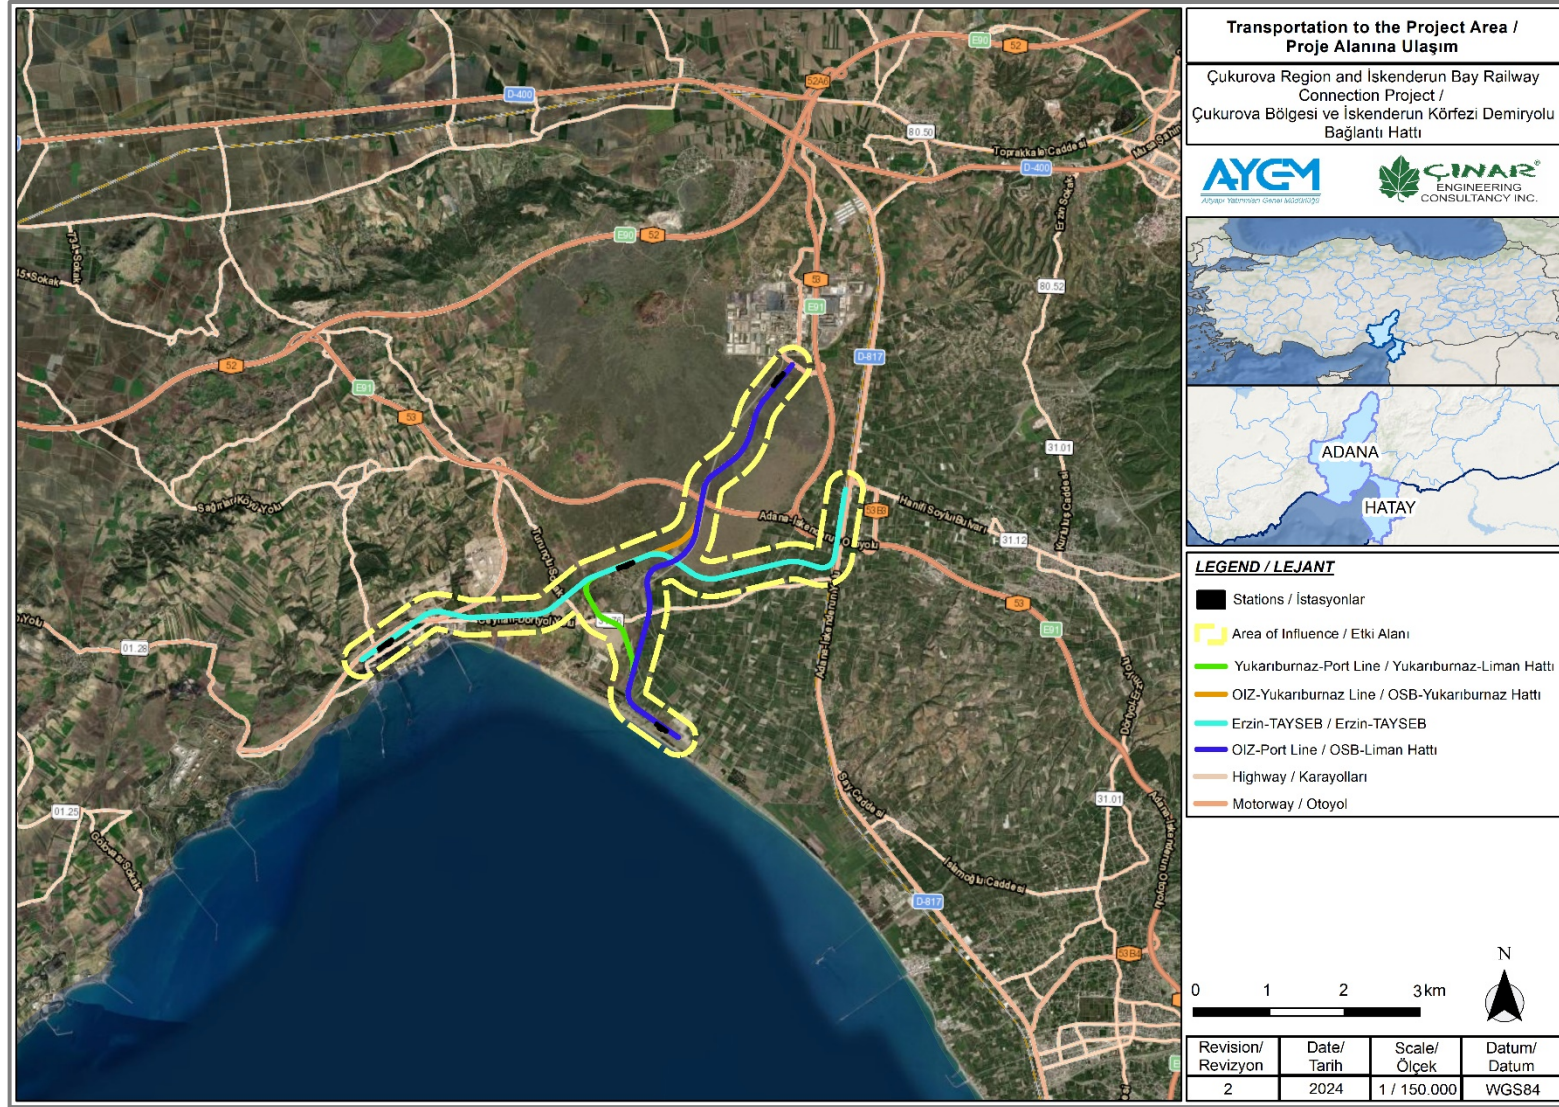


Figure 1. Transportation to the Project Area

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 13 / 20

In this context, no routes other than the aforementioned transportation routes should be utilized by transportation parties, except in cases of necessity. Since the highways are not exclusively reserved for the project components, traffic accidents related to the use of these roads that could affect public health and safety do not fall solely under the responsibility of the project components. However, the presence and positioning of traffic signs, mandated by national legislation at the entrances, exits of the facility, and other necessary points, will be regularly inspected. In case of any nonconformities, the relevant project unit will be contacted, and every possible effort will be exerted to rectify the identified deficiency.

3.2. Construction Phase

Machinery and equipment will be employed during the construction phase of the project, and these vehicles and equipment will operate exclusively within the project area. A total of nine (9) vehicles and equipment units will be utilized during this construction phase, as detailed in Table 2.

Table 2. Vehicles and Equipment to be used during the Construction Phase of the Project

Machine/Vehicle	Quantity
Excavator	1
Truck	2
Backhoe-Loader JCB (4cx)	1
Cylinder	1
Dozer D7	1
Concrete Mixer	1
Concrete Pump	1
Land Rover	1

During the construction phase of the Project, the traffic load caused by the movement of construction machinery prior to the construction works will not cause an increase in existing traffic.

The movement of workers, vehicles, and equipment, as well as transition areas, must be carefully planned and organized within the site. On-site traffic management rules should be adhered to meticulously to mitigate and control potential hazards stemming from the machinery, vehicles, and equipment used on-site.

On-site Traffic Management

- The following rules will be followed for traffic management during the construction phase of the facility:
- The construction site entrances and exits should be designed to use a single point for access.
- Designated areas where personnel on foot are restricted from entering must be identified, communicated to the personnel, and physically secured.
- Machinery like dozers, cranes, and diggers have blind spots that can endanger workers during movement. To mitigate these risks, operators will be accompanied by signalers or spotters during these operations.
- Construction vehicles capable of movement and rotation should be enclosed with cones, warning equipment, and barriers. Personnel working in these areas will be informed about ongoing work.
- After their tasks are completed or temporarily halted, construction machinery and auxiliary vehicles should be parked in suitable designated areas.
- Workers on foot should use marked and barricaded walkways to avoid areas where heavy machinery is in operation and other hazardous zones.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 14 / 20

- Unauthorized personnel will be strictly prohibited from entering the construction site.
- Emergency assembly areas should be designated in non-hazardous zones. Workers should be informed about the location and boundaries of these areas.
- Equipment and vehicle drivers/operators will utilize standardized labels and signs. They will also receive necessary training to effectively communicate with workers on foot, promptly recognize hazardous situations, intervene swiftly, and comprehend the maneuvering limitations of vehicles and equipment.
- The excavated material and vegetative soil resulting from excavation and soil stripping activities will be transported to designated storage areas in a covered manner. This process will adhere to the conditions outlined in Article 128 "Dimensions and Weights of Vehicles" of the Highways Traffic Regulation.
- Trucks used for transportation will be loaded and unloaded gradually and under controlled conditions to prevent excessive dusting during these operations.
- Throughout the construction phase of the Project, strict compliance will be maintained with the Traffic Law No. 2918 and all other laws and regulations pertinent to highways.
- Throughout the construction phase of the project, the location planning of all facility units and structures to be established within the project's scope will adhere to the provisions of the "Regulation on the Facilities to be Built and Opened on the Roadside" and the Highway Expropriation Limit Setbacks.
- While transporting materials and plant machinery-equipment during the construction phase, care will be taken to avoid causing any damage to the highways and related facilities. In the event of any damage, the project owner will assume responsibility for covering the damages, in accordance with the protocol to be established with the Fifth Regional Directorate of Highways.

Off-site Traffic Management

Off-site traffic management will include the following measures:

- Trucks and other vehicles will be equipped with silencers where necessary to mitigate noise.
- Drivers will undergo training to minimize unnecessary noise generation.
- Vehicles transporting materials will be covered with tarpaulins to prevent dust dispersion.
- Trucks will adhere to their maximum load-carrying capacity and will not be overloaded.
- Drivers will comply with Turkish laws regarding speed limits for various vehicle types and road categories.
- Throughout the construction phase, the relevant company will implement a range of traffic safety measures at road entrances and exits, aligned with the guidance of the Fifth Regional Directorate of Highways.
- Appropriate warning signs will be strategically placed on roads and intersections to alert non-project drivers and pedestrians to project-related traffic.
- Work will be scheduled to avoid peak daily activity hours.
- During the construction phase of the Project, entrances and exits to and from the facility will be provided from existing intersections.
- The construction phase of the project will adhere to relevant national legislation and international standards.

According to the Highways Traffic Regulation, Table 3 presents the minimum and maximum speed limits for different vehicle types. Drivers involved in project operations will operate in accordance with this regulation.

Table 3. Road Traffic Regulation, Minimum and Maximum Speed Limits for Vehicle Types

Vehicle Type	Max Speed Limit (km/h)			
	Inside Settlement	Outside Settlement		On Highways
		Intercity Bidirectional	Divided Roads on Highways	
Automobile (M1), (M1G)	50	90	110	120
Minibus (M2)	50	80	90	100
Bus (M2-M3),	50	80	90	100
Pickup truck (N1), N1G)	50	80	85	95
Panel van (N1)	50	85	100	110
Truck (N2-N3), Tow Truck (N2-N3)	50	80	85	90
Motorcycle (L3)	50	80	90	100
Motorcycle (L4, L5, L7)	50	70	80	80
Motorized bicycle (L1, L2, L6) Non-motorized bicycle	30	45	45	Not allowed
Vehicles carrying dangerous goods (if there is no contrary provision in their documents)	30	50	60	70
Vehicles traveling on the highway with a special cargo transportation permit or special permit (If there is no contrary provision in the documents)	30	50	50	60
Rubber wheel tractors	20	30	40	Not allowed
Vehicles towing a faulty vehicle	20	20	30	40
Work machines	20	20	20	No entry without permission from the organization responsible for the construction, maintenance or operation of the road

3.3. Operation Phase

During the operation phase of the Project, an increase in traffic is not expected due to the nature of the activities of project. Since the main objective of the Project is to establish railway connections between the organized industrial areas and planned Erzin Port, it is foreseen that the traffic loads of the mentioned roads will be reduced during the operation phase.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 16 / 20

4. MITIGATION MEASURES AND MANAGEMENT CONTROLS

The contractors will establish communication channels with local authorities under the coordination of DGII for road crossing works. This collaboration will ensure that all requirements set forth by the authorities are effectively met.

Contractors will engage with the local community to discuss the sections of Project traffic routes that intersect their areas. The objective is to minimize safety risks and mitigate impacts on local livelihoods and transportation patterns. This may include considerations for activities such as animal grazing and shuttle services.

A thorough survey will be conducted by the Contractor to assess the condition of roads affected by the construction phase. This assessment aims to identify whether any upgrading activities are needed. Additionally, it guarantees that once construction operations conclude, the roads are restored to their previous or improved conditions.

Access to the construction corridor will largely rely on existing roads. These access roads will be used temporarily for transporting personnel, equipment, vehicles, heavy trucks, and materials to the worksite. Roads unsuitable for accommodating heavy construction machinery will be limited to light truck traffic, such as pickup trucks.

Construction activities will primarily utilize existing asphalt or stabilized roads. These roads typically won't necessitate improvements unless the roadbed's quality has deteriorated, resulting in challenging or unsafe driving conditions for both public and construction-related traffic.

Access to settlements will always be ensured, either by providing detours or allowing vehicle and livestock passage during specific hours. This will be facilitated through the utilization of suitable materials like steel plates placed over trenches. If restrictions on access become necessary, viable alternative solutions will be collaboratively determined with local authorities.

Access to the properties will be guaranteed or appropriate alternative access solution to be agreed with owners or users will be implemented.

Local communities will receive information from the Contractor about planned road closures or disruptions. This communication will occur through official channels and signage, with a minimum of 72 hours' notice.

Easy-to-read signs will be used to indicate any type of diversion or of traffic changes related to the Project activities.

Enhanced safety will be prioritized through temporary traffic control measures and appropriate signage to emphasize warnings.

Temporary traffic control measures will be implemented at intersections and junctions identified as having a higher risk of road accidents.

Intersections where temporary roads intersect with access roads will be designed to ensure traffic safety, especially for heavy-loaded vehicles.

Authorities will be promptly notified when oversize heavy vehicles are required, and these vehicles will be accompanied by escorts.

Regular inspections will be conducted on frequently used roads to ensure they remain undamaged, and repairs will be carried out as needed.

Permission from the relevant authorities will be obtained for night work.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 17 / 20

Staff transportation will be organized with the goal of reducing the required number of vehicles whenever possible. This may involve the use of buses and other collective means of transport.

Local authorities and local communities will be informed and consulted on impacts on traffic due to the Project activities and planned mitigation measures during the pre-construction and construction meetings and related Stakeholder Engagement Activities.

A Grievance Mechanism will be set up for communities and individuals to formally communicate their concerns, complaints and grievances to the Contractor and facilitate resolutions that are mutually acceptable by the parties.

Compensations to accidental damages caused by the Project activities will be determined according to the Community Relations Plan.

Use existing corridors for main access roads and the construction area. The personnel would be transported to the work areas by buses. Minimize the development of new access roads.

Use only existing roads, designated access roads and previously disturbed/cleared sites for the Project facilities.

For new access roads, the design will incorporate appropriate slope and cross-fall drainage systems. This design aims to ensure the safe redirection of storm water to off-road soak ways, effectively preventing erosion and silt buildup. When new access roads are required, the contractor will seek approval from DGII and perform necessary permitting procedures, including Environmental and Social Impact Assessment studies.

Regular maintenance of roads will be conducted to minimize dust generation. Roads frequently used will undergo routine inspections to promptly identify any damage and carry out repairs as needed.

Following the completion of the logistics study and the determination of access roads for the construction phase, the Contractor will conduct a comprehensive construction site traffic risk assessment study.

The Contractor will be responsible for planning and managing vehicle operations on the construction site. The Contractor's HS (Health and Safety) Expert will conduct daily checks to ensure the vehicles are operating properly, and effective vehicle maintenance programs will be established. The Contractor will also ensure the provision of safe work environments at the construction site, including providing defensive driving training for all project personnel.

Regular weekly checks of the construction site will be carried out by the Contractor's HS expert. These checks will aim to inform staff about any potential traffic-related risks.

The steps to be taken after an accident occurs in construction site are explained in the Emergency Preparedness and Response Plan.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 18 / 20

5. TRAINING, REPORTING AND MONITORING

5.1. Training

All employees of the contractor will receive fundamental training on environmental, social, health and safety, labor, and security matters.

Prior to the commencement of the project's construction phase, an assessment of all access roads will be conducted, and all project personnel will undergo essential training to address potential risks. Additionally, the project area will be subject to daily monitoring by OHS teams. This monitoring will identify any additional training needs, and prompt organization of relevant training sessions.

5.2. Reporting and Monitoring

The main monitoring activities, outlined in Chapter 7: Mitigation Plan of the ESMP will focus on ensuring compliance with the mitigation measures and management controls described and key performance indicators identified within the scope of this TTMP.

On-site TTMP monitoring requirements will be detailed in management/implementation plans and procedures to be prepared by the Contractor prior to the onset of the land preparation and construction phase of the Project. Monitoring activities will be designed to target specific topics to meet site-specific requirements in line with the Monitoring Plan framework provided in the ESMP and considering the key performance indicators.

An internal reporting system will be designed to ensure a timely feedback procedure incorporating results of monitoring into management practices. Monitoring Reports will be shared to DGII and WB including status of Key Performance Indicators.

The planned and realized trainings will be followed regularly and all records will be kept. The status of the project area will be checked daily by OHS Teams and in case a possible training need is determined, a new training program will be created and training will be provided to the staff and these trainings will be reported monthly.

Table 4. Monitoring Activities

Requirement	Timeframe	Monitoring Responsibility	Realization Responsibility
Providing traffic related trainings, especially trainings for drivers.	Twice a year	Administrative Affairs Officer	Contractor
Within the scope of the supply of hazardous materials and chemicals, transportation of suppliers in accordance with the Regulation on the Transportation of Dangerous Goods by Road.	Continuous	Administrative Affairs Officer	Contractor
Speed limits in place and enforced,	Zero traffic penalty in a year	Administrative Affairs Officer	Contractor
Periodic maintenance of contractor / sub-contractor is up to date.	1 every 3 months and/or when a new supplier is contracted	Administrative Affairs Officer	Contractor
Traffic signs and facility access roads are appropriate.	Monthly	Administrative Affairs Officer	Contractor

The World Bank and DGII will be promptly notified of any incident or accident related to the Project which has, or is likely to have, a significant adverse effect on the environment, the affected communities, the public or workers including but not limited to; incidents and accidents encountered during construction works, environmental spills, etc.

TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 19 / 20

Sufficient detail will be provided regarding the incident or accident, findings of the Root Cause Analysis (RCA), indicating immediate measures or corrective actions taken or that are planned to be taken to address it, compensation paid, and any information provided by any contractor and supervision consultant, as appropriate. It will be ensured that the incident report is in line with the World Bank's Environment and Social Incidence Response Toolkit (ESIRT). Subsequently, as per the Bank's request, a report on the incident or accident and propose any measures to prevent its recurrence will be prepared.



TRAFFIC (TRANSPORTATION) MANAGEMENT PLAN		CNR-ADN-TTMP-002
Final	Date: March 2024	Page 20 / 20

6. REFERENCES

- Pollution Prevention Plan (CNR-ADN-PPP-002)
- Community Relations Plan (CNR-ADN-CRP-002)
- Employment and Training Plan (CNR-ADN-ETP-002)
- Emergency Preparedness and Response Plan (CNR-ADN-EPRP-002)

